


SOLVLVNOGP

Datasheet

2-Way, Internally Piloted
 Normally Open, 1/2" - 2" NPT

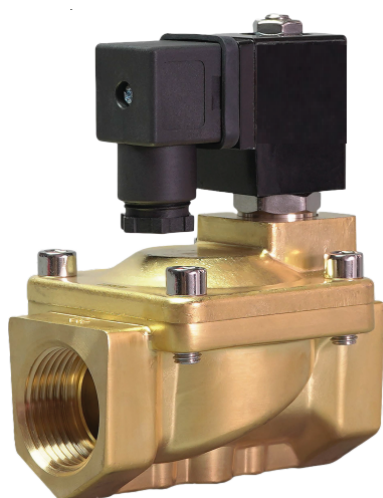

120VAC, 24VAC
 or 24VDC
 Power Input



UL Listed



Normally
 Open



1/2" to 2" NPT
 Available For This
 Model
 Various Other Sizes
 Also Available

Product Overview

CGS water solenoid valves are normally open (N/O) and constructed with a durable brass body, two-way inlet and outlet ports.

Sizes Available

120VAC Models

Valve Size " (inch) NPT	CGS Part Number
1/2"	SOLVLVNOGP12
3/4"	SOLVLVNOGP34
1"	SOLVLVNOGP1
1+1/4"	SOLVLVNOGP114
1+1/2"	SOLVLVNOGP112
2"	SOLVLVNOGP2

24VDC & 24VAC Models

Valve Size " (inch) NPT	CGS Part Number
1/2"	SOLVLVNOGP12-24VDC or AC
3/4"	SOLVLVNOGP34-24VDC or AC
1"	SOLVLVNOGP1-24VDC or AC
1+1/4"	SOLVLVNOGP114-24VDC or AC
1+1/2"	SOLVLVNOGP112-24VDC or AC
2"	SOLVLVNOGP2-24VDC or AC

Electrical Specifications

Voltage	120VAC / 24VAC	Voltage	24VDC
Inrush VA	50/60Hz 82VA	Frequency Hz	DC
Holding VA	50/60Hz 28VA	Power (W)	20 W
Rating	Nema 4	Rating	Nema 4
Coil Type	D	Coil Type	D
Coil Class	F	Coil Class	F

Materials of Construction

Body	Brass
Armature Tube	Stainless Steel 300
Fixed Core	Stainless Steel 400
Plunger	Stainless Steel 400
Spring	Stainless Steel 300
Shading Ring	Copper
Orifice	Brass

Technical Specifications

120VAC Models

Pipe Size (Inch)	Orifice (Inch)	Flow Factor (CV)	Pressure (PSI)	Temp. Range	Voltage	Inrush VA Rating	Holding VA Rating	External Dimensions Length x Width x Height (Inches)	Model	Connector Supplied	Medium Examples	Sealing Material
1/2"	1/2"	4.5	0.5-190	32-266°F	120VAC	82	28	2.59 x 1.89 x 4.89	SOLVLVNOGP12	Wire Connector	Water Non-Potable & Air	EPDM
3/4"	3/4"	7.6	0.5-190	32-266°F	120VAC	82	28	2.95 x 2.28 x 5.12	SOLVLVNOGP34	Wire Connector	Water Non-Potable & Air	EPDM
1"	1"	12	0.5-190	32-266°F	120VAC	82	28	3.78 x 2.76 x 5.16	SOLVLVNOGP1	Wire Connector	Water Non-Potable & Air	EPDM
1 1/4"	1 1/4"	22	0.5-115	32-266°F	120VAC	82	28	5.16 x 3.78 x 6.22	SOLVLVNOGP114	Wire Connector	Water Non-Potable & Air	EPDM
1 1/2"	1 1/2"	30	0.5-115	32-266°F	120VAC	82	28	5.16 x 3.78 x 6.22	SOLVLVNOGP112	Wire Connector	Water Non-Potable & Air	EPDM
2"	2"	48	0.5-115	32-266°F	120VAC	82	28	6.50 x 4.72 x 7.04	SOLVLVNOGP2	Wire Connector	Water Non-Potable & Air	EPDM

24VAC Models

Pipe Size (Inch)	Orifice (Inch)	Flow Factor (CV)	Pressure (PSI)	Temp. Range	Voltage	Inrush VA Rating	Holding VA Rating	External Dimensions Length x Width x Height (Inches)	Model	Connector Supplied	Medium Examples	Sealing Material
1/2"	1/2"	4.5	0.5-190	32-266°F	24VAC	82	28	2.59 x 1.89 x 4.89	SOLVLVNOGP12-24VAC	Wire Connector	Water Non-Potable & Air	EPDM
3/4"	3/4"	7.6	0.5-190	32-266°F	24VAC	82	28	2.95 x 2.28 x 5.12	SOLVLVNOGP34-24VAC	Wire Connector	Water Non-Potable & Air	EPDM
1"	1"	12	0.5-190	32-266°F	24VAC	82	28	3.78 x 2.76 x 5.16	SOLVLVNOGP1-24VAC	Wire Connector	Water Non-Potable & Air	EPDM
1 1/4"	1 1/4"	22	0.5-115	32-266°F	24VAC	82	28	5.16 x 3.78 x 6.22	SOLVLVNOGP114-24VAC	Wire Connector	Water Non-Potable & Air	EPDM
1 1/2"	1 1/2"	30	0.5-115	32-266°F	24VAC	82	28	5.16 x 3.78 x 6.22	SOLVLVNOGP112-24VAC	Wire Connector	Water Non-Potable & Air	EPDM
2"	2"	48	0.5-115	32-266°F	24VAC	82	28	6.50 x 4.72 x 7.04	SOLVLVNOGP2-24VAC	Wire Connector	Water Non-Potable & Air	EPDM

24VDC Models

Pipe Size (Inch)	Orifice (Inch)	Flow Factor (CV)	Pressure (PSI)	Temp. Range	Voltage	W Rating	External Dimensions Length x Width x Height (Inches)	Model	Connector Supplied	Medium Examples	Sealing Material
1/2"	1/2"	4.5	0.5-190	32-266°F	24VDC	20	2.59 x 1.89 x 4.89	SOLVLVNOGP12-24VDC	Wire Connector	Water Non-Potable & Air	EPDM
3/4"	3/4"	7.6	0.5-190	32-266°F	24VDC	20	2.95 x 2.28 x 5.12	SOLVLVNOGP34-24VDC	Wire Connector	Water Non-Potable & Air	EPDM
1"	1"	12	0.5-190	32-266°F	24VDC	20	3.78 x 2.76 x 5.16	SOLVLVNOGP1-24VDC	Wire Connector	Water Non-Potable & Air	EPDM
1 1/4"	1 1/4"	22	0.5-115	32-266°F	24VDC	20	5.16 x 3.78 x 6.22	SOLVLVNOGP114-24VDC	Wire Connector	Water Non-Potable & Air	EPDM
1 1/2"	1 1/2"	30	0.5-115	32-266°F	24VDC	20	5.16 x 3.78 x 6.22	SOLVLVNOGP112-24VDC	Wire Connector	Water Non-Potable & Air	EPDM
2"	2"	48	0.5-115	32-266°F	24VDC	20	6.50 x 4.72 x 7.04	SOLVLVNOGP2-24VDC	Wire Connector	Water Non-Potable & Air	EPDM

Find out more
Canadian Gas Safety Inc
www.canadiangassafety.com

Head office: 150 King Street West Suite 200,
Toronto, ON M5H 1J9
Tel: (647) 577-1500
Email: info@canadiangassafety.com

