

# CGSO2iS Datasheet

## Oxygen Depletion / Enrichment



24VAC or DC  
 Power Input



Standalone  
 Detector or  
 Used with an  
 CGS Controller



Traffic Light  
 Indicator Display  
 Changes Color  
 Dependent On Gas  
 Levels



BMS/BAS  
 Communications



Modern & Compact  
 Design



Alarm Relay  
 Dry Contact



Plug & Play  
 Installation




In-Built  
 Audible Alarm

## Product Overview


The iS range of CGS detectors work in combination with the CGS Merlin range of Gas Detection panels and Utility Controllers or can be used as a standalone detector. The CGSO2iS features an electrochemical sensor for industrial and commercial indoor applications. Compact, modern, digital design makes the units aesthetically pleasing and easy to install.

## Popular Applications

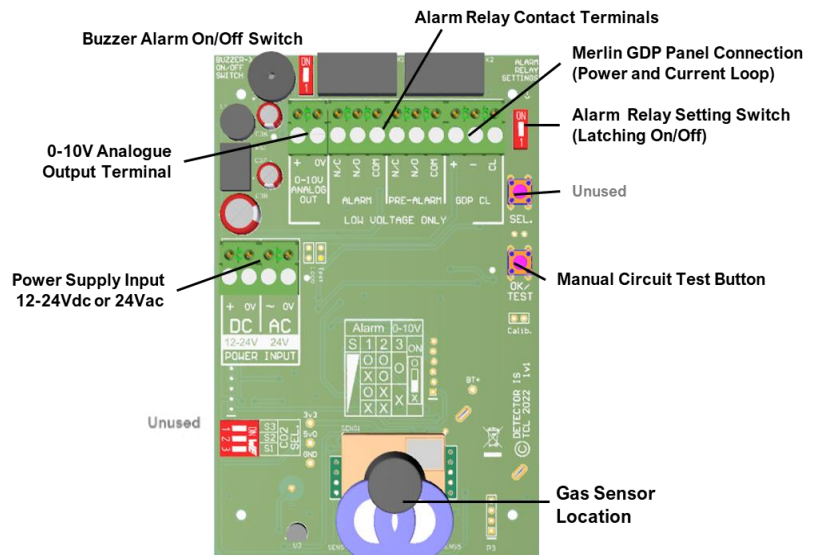

# Technical Specification

General						
Model:	Detector i-S					
Target Gas	O2					
Size: (H x W x D)	5.95 x 4.37 x 1.97" (151 x 111 x 50mm)					
Housing Material:	ABS PA765. Flame Retardant UL 94V-1					
Mounting:	Safe Zone - Indoor use - Wall Mounted					
Weight:	212g					
User Interface						
Display:	1.8" TFT					
Screen Brightness:	Non-Adjustable					
Visual Indicators:	Gas Level (Green: Normal; Yellow: Pre-Alarm; Red: Alarm) 0-10V Output: Relay Output					
Audible Alarm:	>65dB @ 3.28ft (1m). Quiet conditions.					
Language:	English					
Power Supply						
Max. Power Consumption:	1.8W					
Power Rating:	12-24V AC or DC					
Relays						
Volt Free BMS relay outputs:	1A switching current (resistive load) @ 24V AC/DC					
Environmental						
Ingress Protection (IP):	Not Formally Evaluated					
Operating:	-10 ~ 50°C / 20 ~ 90% RH (non-condensing)					
Storage:	0 ~ 50°C / 30 - 80% RH (no condensation)					
Altitude Rating:	2000m					
Wiring						
Typical	Min. 2.5mm <sup>2</sup> / 75°C min / Tinned copper.					
Approvals						
Electrical Safety	BS EN 61010-1:2010 +A1:2019.					
Electromagnetic Compatibility	BS EN 50270.					
Sensor Specification						
Factory Calibration Conditions	25° ± 5°C - 77° ± 41°F (40-70% RH)					
Sensor Type	Semiconductor					
Gas Sensor	Measuring Range (V/V %)	Response (T90)	Recovery (T10)	Alarm: 1 (Pre alarm warning)	Alarm: 2	*EOL (Years)
Oxygen O2	0-25%	<60s	<60s	▼ 19.5%	▼ 18.5% or ▲ 23%	2

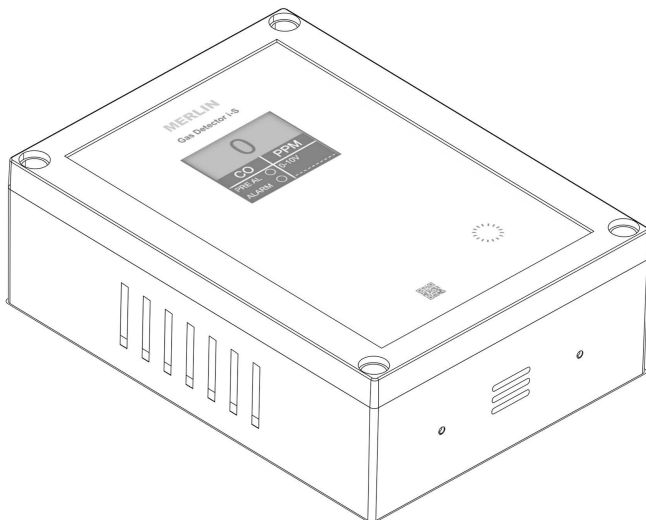

## Area of coverage

Consider the coverage required and function of the area. Emphasis should be placed on airflow patterns and correct placement, not perceived detecting ranges.

The CGSO2iS monitor should be installed approximately 3-5ft from the ground level.

Find out more

**Canadian Gas Safety Inc**

[www.canadiangassafety.com](http://www.canadiangassafety.com)

Head office: 150 King Street West Suite 200,

Toronto, ON M5H 1J9

Tel: (647) 577-1500

Email: [info@canadiangassafety.com](mailto:info@canadiangassafety.com)

