





For your local representative visit
[CANADIANGASSAFETY.COM/CGS-REPS](https://canadiangassafety.com/cgs-reps)
Full product catalogue and operating and
maintenance guides are available online
at [CANADIANGASSAFETY.COM](https://canadiangassafety.com)

Solutions

Science Laboratories	04
Commercial Kitchens	05
Boiler/Mechanical Rooms	06
Refrigerant Gas Detection	07
Parking Garage / Maintenance Bays / Dealerships	08
Warehouse / Forklift / Battery Charging Gas Detection	09
Fire Pits / Heaters / Grills / Gas Features	10
Emergency Service Station Gas Safety	11
Data Center Water Leak Detection	12
Water Temperature Monitoring	13

Products

CGS Controllers	14-17
Gas Detectors	18-21
Ancillaries	22-24
Solenoid Valves	25
Solenoid Valve Enclosures	26
TGC Enclosures	27
Electrical Control	28



Full technical
support available



Easy Installation



Competitively
priced



Complete after
sales care



Modern digital
design



Express delivery
available
nationwide

SCIENCE LABORATORIES

A ball valve is no longer the best means of protection for gas use in a science laboratory.

The simple addition of an CGS Merlin panel can significantly improve teacher control and occupant safety within the classroom.

When using gas in a classroom environment provide more than just on off control. The merlin range of pressure proving panels provide safe start up along with low pressure and over pressure safety.

KEYED GAS,
ELECTRIC & WATER
SHUT OFF WITH
OPTIONAL GAS LEAK
DETECTION

CGS Products Controllers

Merlin 1000S Range p14
Merlin 1000Si Range p14

Gas Detectors

CGSiS Range p18
CGSi Range p18
CGSCO2X p20

Ancillaries

Emergency Shut Off
Buttons p22
Fan Control p22
Audible Alarm Strobes p22

Solenoid Valves

Gas Solenoid Valves p25
Water Solenoid Valves p25

Solenoid Valve Enclosures

Flush Mount / Wall Mount /
Semi-Recessed p26

Electric Control Electrical

Contactors p28
Enclosures p28

CGS Products Controllers

Merlin 1500S Controller pg14

Gas Detectors

CGSiS Range p18
CGSi Range p18
CGSCO2X p20
MINI MERLIN p21

Ancillaries

Emergency Shut Off Buttons p22
Ventilation Proving Interlock p23
Audible Alarm Strobes p22

Solenoid Valves

Gas Solenoid Valves p25

Electric Control Electrical

Contactors p28
Enclosures p28

ADD GAS
CONTROL &
AIR QUALITY
MONITORING
FOR LIFE
SAFETY

COMMERCIAL KITCHENS

Restaurant owners are realizing, now more than ever, how important it is to have safeguards in place when unexpected issues arise.

CGS supply a range of emergency gas shutdown & hazardous gas detection products to provide protection against the dangers of faulty cooking equipment ventilation hoods & improper ventilation.



BOILER/ MECHANICAL ROOMS

According to federal data, incidents related to natural gas pipelines are not uncommon, occurring nearly every other day, causing millions of dollars in property damage and several deaths each year.

Canadian Gas Safety have a solution for every commercial boiler room application. We offer a wide range of control panels, gas detectors, heat sensors, audible alarm beacons and gas solenoid valves. Whether your project is a small boiler room or a large scale mechanical room we have the knowledge and experience to offer the perfect products.



PROTECTING BUILDINGS & LIFE FROM THE DANGERS OF GAS

CGS Products Controllers

GDP2X (8 Zone) Controller p16
GDPX+ (16 Zone)
Controller p16

Gas Detectors

CGSiS Range p18
CGSi Range p18
CGSTFT Range p19

Ancillaries

Emergency Shut Off
Buttons p22
Audible Alarm Strobes p22

Solenoid Valves

Gas Solenoid Valves p25

Solenoid Valve Enclosures

Flush Mount / Wall Mount /
Semi-Recessed p26

CGS Products Controllers

Merlin GDP2X (8 zone) p16
MerlinGuard (16 zone) p16

Gas Detectors

CGSTFT Range (Used with
CGS Controller) p19
CGSRG p19

Ancillaries

Audible Alarm Strobes p22



CHILLER ROOM & VRF REFRIGERANT DETECTION SOLUTIONS

REFRIGERANT GAS DETECTION

Refrigerant is the process of cooling a space, substance or system to lower or maintain its temperature.

Canadian Gas Safety offer a range of refrigerant gas detection solutions & detectors to meet code requirements.

PARKING GARAGE / MAINTENANCE BAYS / DEALERSHIPS

Carbon monoxide and nitrogen dioxide gas detection with ventilation control as required by NECB A-5.2.3.4(1)

Installing a CO/NO2 system stands as the sole alternative to continuously operating fans at maximum speed throughout each day, as stated by NECB.

Enclosed parking garages have traditionally relied on detection systems to monitor vehicle exhaust, primarily targeting gases like Carbon Monoxide and Nitrogen Dioxide that arise from incomplete combustion in vehicles.

One significant advantage of implementing a gas detection system in a garage is the potential for reducing expenses associated with electrical and energy consumption by automatically regulating mechanical ventilation & dampers dependent on the gas levels within the space. On average, the investment made in a gas detection system can be recovered within a year.



CO/NO2
MONITORING
WITH NO
PROGRAMMING

**CGS Products
Controllers**
ParkSafe Controller p15

Gas Detectors
CGSPS Range p20

Ancillaries
Audible Alarm Strobe p22

**CGS Products
Controllers**
Merlin GDP2X (8 zone) p16
MerlinGuard (16 zone) p16

Gas Detectors
CGSTFT Range (Used with
CGS Controller) p19

Ancillaries
Audible Alarm Strobes p22

COMPLY
WITH SAFETY
REGULATIONS



WAREHOUSE / FORKLIFT / BATTERY CHARGING GAS DETECTION

Batteries produce hydrogen when they are charging, which can leak into the atmosphere and cause a potential explosion hazard if the levels rise to a dangerous level.

Warehouse facilities containing forklifts, battery charging rooms & data centers are common spaces that require hydrogen gas detection in accordance with code.

FIRE PITS / HEATERS / GRILLS / GAS FEATURES

Communal areas are offering more conveniences, including gas powered grills, heaters & fire pits.

Control of these spaces are essential to protect life & property damage from improper use. Canadian Gas Safety provide the ideal safety solution. Local & 24/7 programmable timed control, emergency shutdown & alarm activation.

TIMED
CONTROL FOR
GAS FEATURES



**CGS Products
Controllers**
CGSTGC p15

TGC Enclosures
Wall Mount p27
Flush Mount p27

Gas Detectors
CGSCH4CO Range p21
CGSLPGCO Range p21

Ancillaries
Audible Alarm Strobe p22
Emergency Shut Off Buttons p22
24/7 Programmable Timer p23

**CGS Products
Controllers**
CGS1000Si p14

Outdoor Grill Gas Control
CGSTGC p15
CGSTGC Enclosures p27

Ancillaries
Audible Alarm Strobe p22
Emergency Shut Off Buttons p22

Apparatus Bays
Merlin ParkSafe Controller p15
Audible Alarm Strobe p22
Emergency Shut Off Buttons p22

Gas Detectors
CGSPS Range p20

Ancillaries
Audible Alarm Strobe p22



EMERGENCY SERVICE STATION GAS SAFETY

When emergency service personnel rush to help, they sometimes leave their Gas or Electric ranges on. These instances can lead to embarrassing if not fatal accidents which can cause huge amounts of damage.

PROTECTING THE
PEOPLE WHO
PROTECT US

Canadian Gas Safety provide a simple solution to connect the annunciation alarm to an CGS controller within the firehouse which will isolate the gas or electric whenever a call comes in. If the alarm goes off and some firefighters are still cooking they can override the shutdown using a simple authority key. Apparatus/ service bays are typically connected to occupied spaces where people inhabit. The vehicles within these areas produce toxic gases such as carbon monoxide & nitrogen dioxide. Gas detection & ventilation control is essential for life protection.

WATER LEAK DETECTION

Permanent water leak detection system aimed towards commercial properties and residential apartment blocks.

Water leak detection systems are frequently implemented in data centers, communications rooms, and other structures reliant on information technology. The importance lies in safeguarding these vital assets from fires and floods by promptly receiving notifications of any incidents, facilitating swift action for preventive measures and sometimes shutdown of water. The leakage of water from sources such as HVAC systems, AC units, water pipes, drainage, or even groundwater can result in substantial disruptions.

ROPE / PUCK
WATER LEAK
DETECTION



- CGS Products**
Controllers
CGSWLM p17
- Detectors**
Sensing Cable p24
Puck/Probe p24
- Solenoid Valves**
Water Solenoid Valves p25
- Ancillaries**
Audible Alarm Strobe p22

- CGS Products**
Controllers
CGSWTM p16
- Solenoid Valves**
Water Solenoid Valves p25
- Ancillaries**
Audible Alarm Strobe p22
Emergency Shut Off Buttons p22



PREVENTION OF
SCALDING FROM
FAULTY MIXING
VALVES

WATER TEMPERATURE MONITORING

The CGS Water Temperature Monitor (WTM) is carefully designed for health care facilities to monitor and control the water supply system.

WTM will prevent scolding water going down the pipe and potentially burning the end user. The WTM incorporates a simple user interface to reset and/or silence alarm condition. Minimum and Maximum permitted water temperatures are configurable via the internal switch and fascia controls upon installation.

CGS CONTROLLERS

Merlin 1000S Range



- Features**
- ✓ Three Models - Single, Dual or Tri Utility Control Output
 - ✓ Original Gas Pressure Proving Technology With Low & High
 - ✓ Gas Pressure Monitoring
 - ✓ Key Lock Authority Prevents Tampering & Gives Teachers Full Control Over Classroom Utilities
 - ✓ Automatic Time-Out Feature
 - ✓ Quick Emergency Shutdown
 - ✓ UL 61010 Listed

Popular Applications
Science Laboratories K-12, Colleges & Universities

Merlin GDP2X



- Features**
- ✓ 8 zone gas detection system
 - ✓ Audible & Visual Alarms
 - ✓ Remote Communications
 - ✓ Fan Activation
 - ✓ Automatic & Manual Shutdown
 - ✓ Connectivity For Fire Alarms & Remote Panic Buttons
 - ✓ Custom Applications

Popular Applications
Chiller Rooms, Battery Storage, Boiler Rooms, Oxygen Depletion/Enrichment & Breweries

Merlin 1000Si Range

- Features**
- ✓ Three Models - Single, Dual or Tri Utility Control Output
 - ✓ Key Lock Authority Prevents Tampering & Gives Teacher Full Control Over Classroom Utilities
 - ✓ Automatic Time-Out Feature
 - ✓ Quick Emergency Shutdown
 - ✓ UL 61010 Listed

Popular Applications
Science Laboratories K-12, Colleges & Universities



Merlin GDPX+



- Features**
- ✓ 16 zone gas detection system
 - ✓ Audible & Visual Alarms
 - ✓ Remote Communications
 - ✓ Fan Activation
 - ✓ Automatic & Manual Shutdown
 - ✓ Connectivity For Fire Alarms & Remote Panic Buttons
 - ✓ Custom Applications

Popular Applications
Chiller Rooms, Battery Storage, Boiler Rooms, Oxygen Depletion/Enrichment & Breweries



Merlin 1500S Range



- Features**
- ✓ Interlock up to 4 fans using Air PD switches or fan current sensors.
 - ✓ Gas solenoid cannot be opened unless the ventilation system is proven to be working effectively.
 - ✓ Will accept remote emergency knock-off buttons.
 - ✓ Key switch operation gives the user full control.
 - ✓ Clear LED display for system indications.
 - ✓ Compatible with both BMS and fire alarm systems.
 - ✓ UL 61010 Listed

Popular Applications
Commercial Kitchens

CGS ParkSafe



- Features**
- ✓ Pre programmed relays & 0-10VDC output
 - ✓ No field programming required
 - ✓ Digital touch screen display
 - ✓ Monitor up to 16 individual gas detectors, their locations, gas levels and service requirements
 - ✓ UL61010 Listed

Popular Applications
Parking Garage / Maintenance Bays / Dealerships

CGS CONTROLLERS

CGSTGC



- Features**
- ✓ Automatic Control Over Gas
 - ✓ 110V ac or 24V ac/dc Power Supply
 - ✓ Manual Reset After Alarm Condition
 - ✓ Four Time Delay Options – 30 minutes, 1 hour, 2 hours or 3 hours
 - ✓ Heaters – 110V ac or 24V ac/dc
 - ✓ Easily wall mounted and labelled PCB
 - ✓ Weatherproof cover available pg 27

Popular Applications
Fire pits / Heaters / Grills / Gas features

MerlinGuard



- Features**
- ✓ Pre programmed relays & 0-10VDC output
 - ✓ No field programming required
 - ✓ Digital touch screen display
 - ✓ Monitor up to 16 individual gas detectors, their locations, gas levels and service requirements
 - ✓ UL61010 Listed

Popular Applications
Refrigerant, Toxic & Combustible Gas Monitoring

CGSWTM

- Features**
- ✓ 24V or 120V Power Input
 - ✓ Valve Isolation Capabilities
 - ✓ Adjustable Temperature Set Points
 - ✓ Simple & Quick Setup
 - ✓ Low Temperature Cut Off Feature Available
 - ✓ BMS/BAS Communications
 - ✓ Dry Alarm Relay & 0-10V Analog Output
 - ✓ In-Built Audible Alarm]

Popular Applications
Health Care Facilities



CGSWLM



- Features**
- ✓ 24V or 120V Power Input
 - ✓ 24V or 120V Water Valve Isolation
 - ✓ Standalone or Multi-Zone With WLMZ Range
 - ✓ LED Status Indicator
 - ✓ Wiring/Cable Fault Indicator
 - ✓ BMS/BAS Communications
 - ✓ Used With CGS Sensing Cables and/or Probes
 - ✓ In-Built Audible Alarm

Popular Applications
Data Centers, Water Heaters, Drip Pans



GAS DETECTORS

CGSiS (With Screen)



- Features**
- ✓ 24VAC or DC Power Input
 - ✓ LED Status Indication Display
 - ✓ Modern & Compact Design
 - ✓ Plug & Play Installation
 - ✓ Standalone Detector or Used With A CGS Controller
 - ✓ BMS/BAS Communications
 - ✓ Alarm Relay Dry Contact
 - ✓ 0-10VDC Output
 - ✓ Built-In Audible Alarm

Popular Applications
Commercial Spaces Such As Schools, Office, Boiler/ Mechanical Rooms, Chiller Rooms, Warehouses, Emergency Service Stations, Data Centers, Parking Garages & more

Gases Available
Carbon Monoxide, Natural Gas, Liquified Petroleum Gas, Hydrogen, Carbon Dioxide, Nitrogen Dioxide, Oxygen Depletion/Enrichment, Refrigerant

CGSTFT



- Features**
- ✓ 24VAC or DC Power Input
 - ✓ Traffic Light Indicator Display Changes Color
 - ✓ Modern & Compact Design
 - ✓ Plug & Play Installation
 - ✓ Standalone Detector or Used With An CGS Controller
 - ✓ BMS/BAS Communications
 - ✓ Alarm Relay Dry Contact
 - ✓ Built-In Audible Alarm
- Popular Applications**
Commercial Spaces Such As Schools, Office, Boiler/ Mechanical Rooms, Chiller Rooms, Warehouses, Emergency Service Stations, Data Centers, Parking Garages & more
- Gases Available**
Carbon Monoxide, Natural Gas, Liquified Petroleum Gas, Hydrogen, Carbon Dioxide, Nitrogen Dioxide, Oxygen Depletion/ Enrichment, Refrigerant

CGSi (Without Screen)

- Features**
- ✓ 24VAC or DC Power Input
 - ✓ Traffic Light Indicator Display Changes Color
 - ✓ Modern & Compact Design
 - ✓ Plug & Play Installation
 - ✓ Standalone Detector or Used With A CGS Controller
 - ✓ BMS/BAS Communications
 - ✓ Alarm Relay Dry Contact
 - ✓ 0-10VDC Output
 - ✓ Built-In Audible Alarm

Popular Applications
Commercial Spaces Such As Schools, Office, Boiler/ Mechanical Rooms, Chiller Rooms, Warehouses, Emergency Service Stations, Data Centers, Parking Garages & more

Gases Available
Carbon Monoxide, Natural Gas, Liquified Petroleum Gas, Hydrogen, Carbon Dioxide, Nitrogen Dioxide, Oxygen Depletion/ Enrichment, Refrigerant



CGSR-NDIR

- Features**
- ✓ Blank or LED Display
 - ✓ Analog: 3x 0-10V signals for A2L Refrigerants (PPM), Temperature (°F) and Humidity (% Relative).
 - ✓ Digital RS-485: Modbus RTU or BACnet MS/TP communication protocols.
 - ✓ VFC Relay (CO2): 1x SPST 70mA Max.
 - ✓ Thermistor output for 3rd party temperature monitoring.
 - ✓ Excellent stability and strong anti-interference, long-life sensors.
 - ✓ Fully calibrated.

Popular Applications Any occupied spaces with VRF (variable refrigerant flow) systems

Gases Available
R1234yf / R1234ze / R134a / R32 / R404a / R407c / R410a / R454a / R454b / R454c / R455a (Others on request)



GAS DETECTORS




CGSCO2X

Features

- ✓ Dual Power 100-120V AC or 12-24V AC / DC
- ✓ CO2 & Temperature Monitor
- ✓ Automatically Drive Ventilation Fans To Reduce CO2 / H / T
- ✓ Modern & Compact Design
- ✓ Plug & Play Installation
- ✓ Clear TFT Screen Displays Live Gas Levels & Status Indications
- ✓ BMS & Fire Panel Connectivity
- ✓ Three Alarm Relays & 0-10VDC Output
- ✓ Fan Boost, Mute & Wake Up Button

Popular Applications
Any occupied spaces
Gases Available: Carbon Dioxide



CGSCH4CO (Mini Merlin)

Features

- ✓ Combined Natural Gas & Carbon Monoxide Monitoring
- ✓ Automatic Emergency Shutdown Of Gas, Heaters & Other Equipment
- ✓ Manual Reset After Alarm State
- ✓ Plug & Play Installation
- ✓ Modern Design
- ✓ BMS & Fire Panel Connectivity
- ✓ Three Models Available For Specific Code Requirements
- ✓ UL Listed

Popular Applications
Anywhere where the combustion of gas is present

Gases Available
Gases Available: Carbon Monoxide, Natural Gas (Methane)

CGSPS

Features

- ✓ 24VDC Power Input
- ✓ Traffic Light Indicator Display
- ✓ Modern & Compact Design
- ✓ Plug & Play Installation
- ✓ Used With The ParkSafe Controller
- ✓ BMS Communications
- ✓ Up To 16 Detectors Can Be Linked Together
- ✓ End Of Operational Life & Annual Service Notifications To ParkSafe Controller

Popular Applications
Emergency Service Stations, Parking Garage / Maintenance Bays / Dealerships

Gases Available
Carbon Monoxide, Nitrogen Dioxide




CGSLPGCO (Mini Merlin)

Features


- ✓ Combined LPG & Carbon Monoxide Monitoring
- ✓ Automatic Emergency Shutdown Of Gas, Heaters & Other Equipment
- ✓ Manual Reset After Alarm State
- ✓ Plug & Play Installation
- ✓ Modern Design
- ✓ BMS & Fire Panel Connectivity
- ✓ Three Models Available For Specific Code Requirements
- ✓ UL Listed

Popular Applications
Anywhere where the combustion of gas is present

Gases Available
Carbon Monoxide, Liquified Petroleum Gas (LPG)



ANCILLARIES



Emergency Shut Off Buttons

Features

- ✓ Twist release reset or keyed-reset
- ✓ Various colors, text & design types available
- ✓ ADA Compliant
- ✓ Indoor & Outdoor Use Models
- ✓ Quick Action Emergency Shut Off

Popular Applications
Anywhere that requires emergency shut off for utilities such as gas, electric, water & air


Fan Control

Features

- ✓ Automatically Switches Fan On and Off
- ✓ Selectable Power Off Delay To Allow Residual Fumes To Dissipate
- ✓ Manual Key Switch Override Of The Fans
- ✓ Designed To Work In Conjunction With The Merlin Range Of Utility Systems
- ✓ Colored LED Panel States

Popular Applications
Educational Buildings






Audible Alarm Strobes

Features

- ✓ Alarm/siren offers 32 selectable sounds and volume control
- ✓ Includes high intensity LEDs
- ✓ 8 Flash Patterns
- ✓ Typical Working Properties Of Polycarbonate Are -40° to 250° F
- ✓ Three year guarantee against breakage of polycarbonate in normal use (one year on electro mechanical and electronic components).
- ✓ Designed to meet the requirements of IP54.

Popular Applications
Educational Buildings, Boiler/Mechanical Rooms, Chiller Rooms, Warehouse Facilities, Parking Garages, Maintenance Bays, Emergency Service Stations, Data Centers



Ventilation Proving Interlock

Features

- ✓ Ensures Mechanical Ventilation Is Running Before Allowing Gas Valve To Open (When Used With CGS Commercial Kitchen Ventilation Interlock System)
- ✓ Filter Monitoring
- ✓ Low And Over Pressure Monitoring
- ✓ Alarm Activation At A Pre-Set Value
- ✓ Comes With 40" Ducting Tube And Probe


Popular Applications
Commercial Kitchens

24/7 Programmable Timer

Features

- ✓ Program can be repeated on a weekly basis
- ✓ Multi-volt operation from 120-277 VAC, 50/60 Hz
- ✓ To-the-minute programming for accurate load control and reduced energy costs
- ✓ Up to 28 setpoints
- ✓ Automatic Daylight Saving Time (DST) ON/OFF adjustment (factory enabled)
- ✓ Non-volatile EEPROM memory protects programming indefinitely
- ✓ Temporary override or permanent manual override available via control buttons
- ✓ 2-circuit models are field (jumper) configurable for: 2 independent outputs, DPST output, or 1 channel ON pulse/OFF pulse output

Popular Applications
Fire Pits, Heaters, Grills, Gas Features



WATER LEAK SENSORS



CGSRP WLM 2 Core Sensing Cable

- Features**
- ✔ 2 core tape designed for water leak detection.
 - ✔ Features a sleek design that facilitates quick drying.
 - ✔ Factory-terminated lengths, available in 6, 12, 24, 48, 100 foot.
 - ✔ Custom pre-defined lengths available upon request.
 - ✔ Compact, yet robust, displaying high resistance to abrasion and corrosion.
 - ✔ Identifies water presence along its entire length.
 - ✔ Compatible with monitoring by the CGSWLM.

CGSPLRP WLM 4 Core Sensing Cable

Features

- ✔ 4 core tape designed for water leak detection.
- ✔ Includes fault detection, indicating incorrect wiring or faulty cable.
- ✔ Features a sleek design that facilitates quick drying.
- ✔ Factory-terminated lengths, available in 16, 32 or 65 foot.
- ✔ Compact, yet robust, displaying high resistance to abrasion and corrosion.
- ✔ Identifies water presence along its entire length.
- ✔ Compatible with monitoring by the CGSWLM.



CGSP WLM Puck / Probe

- Features**
- ✔ Connect up to 8 sensors in parallel up to 200ft using 22AWG twisted pair.
 - ✔ Can be used to detect water or the absence of water.
 - ✔ Will not alarm due to condensation or humidity.
 - ✔ Designed to detect nonflammable conductive liquids (distilled water cannot be detected)
 - ✔ Compatible with monitoring by the CGSWLM

SOLENOID VALVES



Gas Solenoid Valves

- Features**
- ✔ Zero Differential
 - ✔ 110V/120V ac 50/60HZ
 - ✔ Visual Power Indication
 - ✔ 0-5 PSI Max Working Pressure
 - ✔ ¼" Inlet & Outlet Ports
 - ✔ Body: Toughened Die Cast Aluminum
 - ✔ Max Temp: 140°F, Min Temp 5°F
- Other models available, sizes ranging from ½" – 6"

Popular Applications
Science Laboratories, Commercial Kitchens, Boiler/Mechanical Rooms, Gas Feature Control, Emergency Service Stations

Water Solenoid Valves

Features

- ✔ 120VAC, 24VAC or 24VDC Models Available
- ✔ Normally Closed Safety Shut Off
- ✔ UL Listed
- ✔ NSF Approved Lead Free Brass Body
- ✔ Various Models & Pressures Available
- ✔ ½" – 2" NPT Available

Popular Applications
Educational Buildings, Commercial Buildings




General Purpose / Specialty Solenoid Valves

- Features**
- ✔ 120VAC, 24VAC or 24VDC Models Available
 - ✔ Normally Closed Safety Shut Off
 - ✔ UL Listed
 - ✔ Various Models & Pressures Available
 - ✔ ½" – 2" NPT Available

Popular Applications
Any application where non drinkable water or air control is required

SOLENOID VALVE ENCLOSURES



Flush Mount / Wall Mount / Semi-Recessed

Features

- ✔ Designed to enclose electrical and/or electronic equipment and protect against harsh, industrial environments for wall-mount applications.
- ✔ Hidden hinges and various latching systems
- ✔ A wide range of sizes and practical accessories available.

Popular Applications
Educational Buildings, Commercial Buildings

Access panels


Features

- ✔ Material: Up to 16" X 16" - 16 gauge, 18 gauge mounting frame, over 16" X 16" - 14 gauge door, 16 gauge mounting frame
- ✔ Door: Flush to frame with rounded safety corners
- ✔ Mounting Frame: One piece outer flange welded to mounting frame
- ✔ Hinge: Continuous, concealed
- ✔ Latch: Stainless Steel screwdriver operated cam latch
- ✔ Optional Latches/Locks: Cylinder lock and key, allen head cam latch, spanner head cam latch, torx head with security pin
- ✔ Finish: Steel: 5-stage iron phosphate preparation with prime coat of White alkyd baking enamel OR Stainless Steel: Type 304 - #4 satin polish

Popular Applications
Educational Buildings, Commercial Buildings



TGC ENCLOSURES



TGC Enclosures

Features

- ✔ Flush or wall mount type available
- ✔ Polycarbonate cover used to protect AGSTGC without restricting legitimate operation
- ✔ Provides protection against physical damage, dust, grime and severe environment conditions inside and out
- ✔ Can be used for indoor or outdoor applications

Popular Applications
Gas Feature Control, Emergency Service Stations



ELECTRICAL CONTROL

Electrical contactors

Features

- ✓ 4 pole, normally open relays
- ✓ Size S00
- ✓ High degree of contact stability at low voltages & current
- ✓ Suitable for use with solid-state circuits with currents ≥ 1 mA at a voltage of ≥ 17 V
- ✓ Capable of expansion by up to four contacts through use of snap-on auxiliary switch blocks
- ✓ Standards: IEC/EN 60947-1, IEC/EN 60947-4-1, IEC/EN 60947-5-1
- ✓ Approvals: UL listed / UL listed for Canada

Popular Applications

Educational Buildings, Commercial Buildings



Electrical contactor enclosures

Features


- ✓ Various sizes available
- ✓ Formed and spot welded from 16 or 14 gauge steel depending on size.
- ✓ Formed steel covers close by use of slotted quarter turn latch.
- ✓ Full swing door using butt hinges.
- ✓ Easily removed knockouts on all 4 sides (see drawings for sizes and locations)
- ✓ Through holes in back for wall mounting.
- ✓ Grounding location embossed in body.
- ✓ Enclosure and cover are finished in ANSI 61 gray powder coating. Type 1 lock kit

Popular Applications

Educational Buildings, Commercial Buildings



SCAN WITH YOUR SMART PHONE TO
VIEW OUR FULL RANGE ONLINE

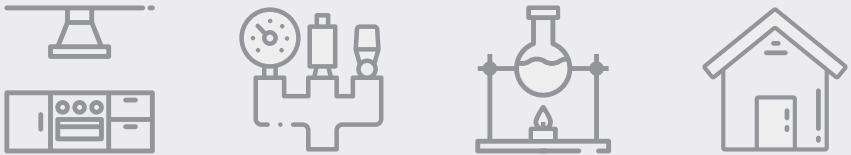

For our full range of products & services visit us at
WWW.CANADIANGASSAFETY.COM



WWW.CANADIANGASSAFETY.COM

CGS HEAD OFFICE +1 (647) 577-1500

EMAIL: INFO@CANADIANGASSAFETY.COM