

MerlinGuard Datasheet

Gas Detection & Ventilation Control System



MerlinGuard Product Overview



The MerlinGuard is a gas detection panel designed by Canadian Gas Safety (CGS) to be used with up to sixteen (16) CGS TFT detectors. It is intended for use in spaces that require either refrigerant, toxic or combustible gas detection and provides a pre-programmed control panel including features such as fan control options, alarm damper control, and connectivity to Building Management Systems (BMS).

The panel has four output options for pre-alarm and high-alarm conditions, and contains a 0-10V output that can be utilized by the BMS or for fan control via VFD.

The MerlinGuard is a compact and versatile solution for gas detection in various applications. Please contact CGS or your local representative for further information.

General	
Model:	MerlinGuard Controller
Capacity:	Up to 16 channels per controller unit.
Size: (H x W x D)	7.08 x 10.03 x 3" (180 x 255 x 77 mm)
Housing Material:	ABS Polyloc - PA765. / UL 94 V-1
Mounting:	Indoor Use - Wall Mounting
Weight:	1.3kg (2lb 13.85oz)
Display:	4.3" TFT Touch Screen
Visual Indicators:	TFT visual. Green: Normal; Yellow: Pre-Alarm; Amber: Alarm Delay: Red: Alarm Relay Outputs On/Off / Gas Detection Status.
Audible Alarm:	>70dB @ 3.28ft (1m). Quiet conditions.
Buttons:	Common for Silence/Reset operation.
Power Consumption:	14.5W max.
AC Power:	100-120V~ 50/60Hz
Internal Fuse:	T3.15A L250V
Relay Output:	Volt Free Relay Outputs x4 (non-latching) / NO/COM/NC 6A @ 120V~
Common Output:	User configurable – energised/de-energised, time delay / 24 VDC switching.
Ingress Protection:	IP64 / NEMA 4 (See manual for further information)
Operating:	-10 ~ 50°C / 14 ~ 122°F 30 ~ 80% RH (non-condensing)
Storage:	-25 ~ 50°C / -13~122°F up to 95% RH (non-condensing)
Typical Wiring	Power & Relay: ~#18-12AWG Detector: #12-18AWG Power Pair; #18-22AWG Data Pair Other: #18-22AWG
Electromagnetic Compatibility and Electrical Safety	IEC 61010-1:2010 + AMD1:2016; EN 61010-1:2010 +A1:2019; UL61010-1/2012/ CAN CSA C22.2 No. 61010-1-12/ EMC EN 61326-1:2013

MerlinGuard PCB Overview

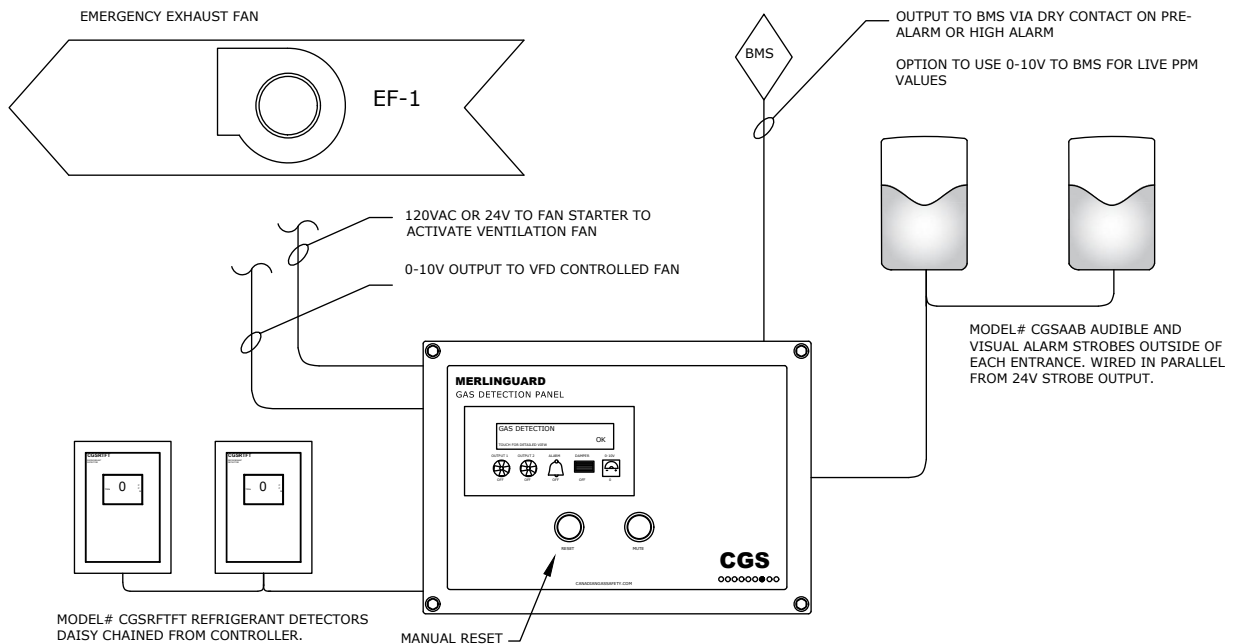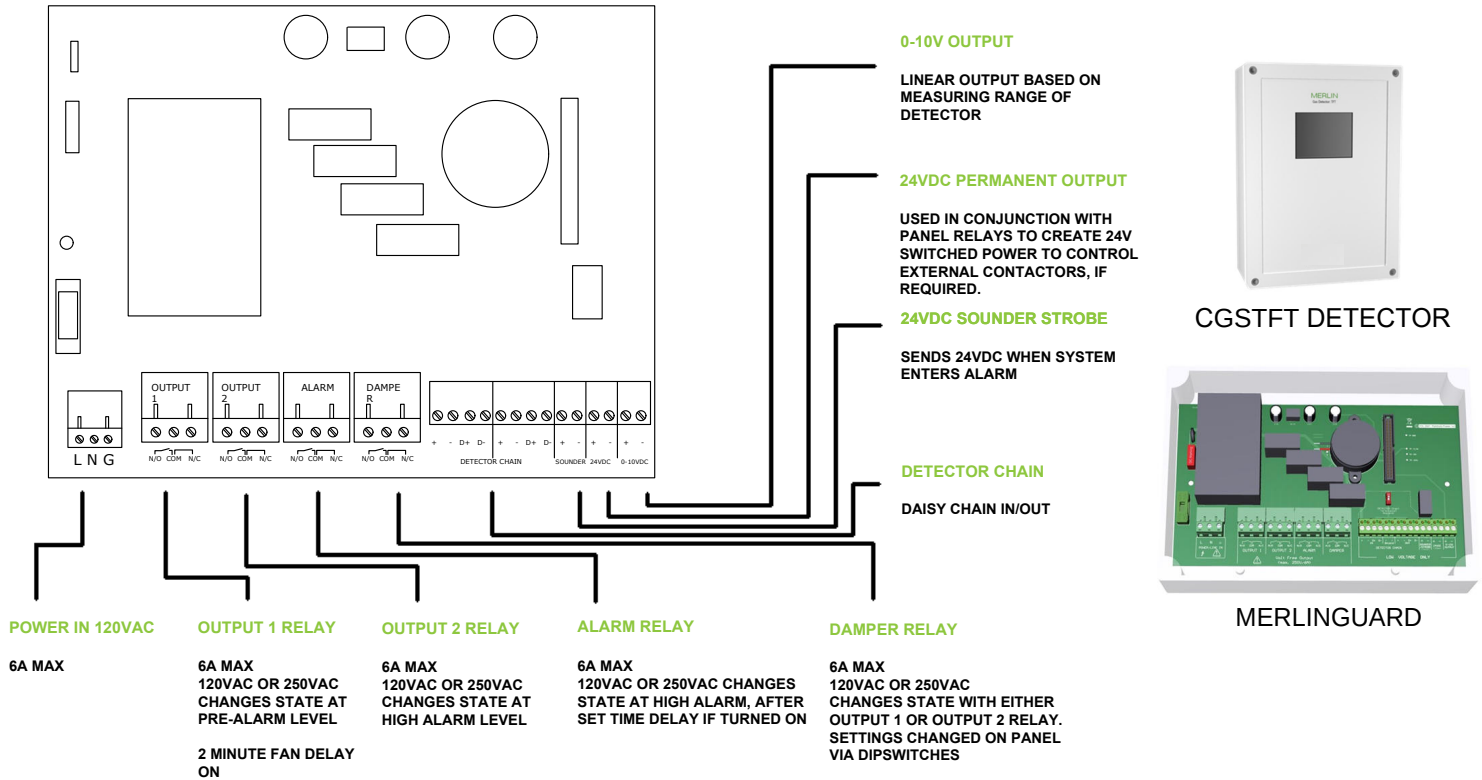

1. Use the high alarm relay (output 2) to send 120VAC or 24VAC power to the fans to activate them. This design would require two fans. One fan would cover your standby airflow rate, and the second fan would turn on during a gas detected scenario and increase the ventilation rate to the emergency extraction rate defined by ASHRAE of 100X the standby rate. Use ASHRAE 8.9.8.1 to calculate ventilation rate.
2. Use the 0-10V output to signal a VFD control fan, and have it run at a continuous standby rate and ramp up to the emergency extraction rate upon detection. The 0-10V output will send a linear voltage signal to the VFD based on the sensing range of the detector.

Find out more
Canadian Gas Safety Inc
www.canadiangassafety.com

Head office: 150 King Street West Suite 200,
Toronto, ON M5H 1J9
Tel: (647) 577-1500
Email: info@canadiangassafety.com

