



Features

- Offers 32 different tones
- Includes 10 high density LEDs
- For indoor use only, see CGSAAB-WC for a weatherproof cover
- Low power consumption which allows for multiple strobes from one control panel
- Durable polycarbonate construction
- Made in the USA

Compatible Accessories

CGSAAB-WC Weatherproof Cover

Product Overview


The CGSAAB is a remote visual and audible alarm beacon designed for use with the CGS gas detection series of products, including the GDP, MerlinGuard, and ParkSafe controllers. The CGSAAB offers a highly effective way to alert of a hazardous gas leak condition. The low power model give the capabilities to have more strobes from one panel. The CGS detection products feature integral alarm buzzers, but the CGSAAB offers redundancy and alarm in remote locations.

Wiring to CGS Control Panels


The CGS Control panels provide 12-24V dedicated outputs for alarm strobes. The diagram below shows a general detail on how the strobe wires to the control panel. The control panel terminal configurations may vary from panel to panel. See the control panel user manuals for more details on the strobe outputs.



Control Panel

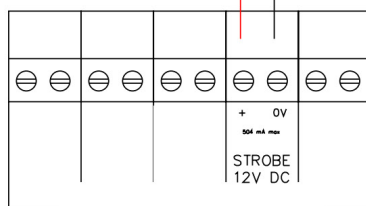

Strobe



FACTORY INSTALLED JUMPER

Additional Colour Models



CGSAAB-G



CGSAAB-A



CGSAAB-W




CGSAAB-B


Technical Specifications

Operating Voltage	12-24VDC
Power Consumption	Stand by: 50 μ A
	Siren low volume: 85mA
	Siren high volume: 90mA
	Strobe: 25mA
Siren Volume	Low: 85 dB at 1'
	High: 100 dB at 1'
Alert Tone	32 selectable sounds

Dimensions

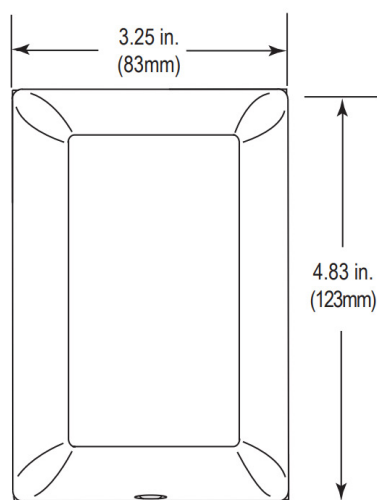

FRONT

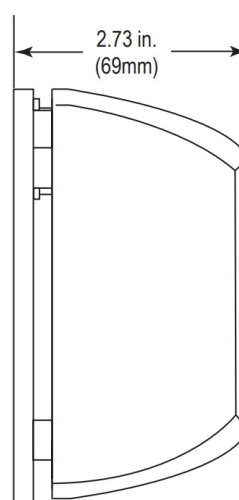

SIDE