



Features

- Protects against vandalism, accidental damage, dust and grime
- Indoor / Outdoor use
- Twist release reset
- ADA Compliant
- Various colors, text & design types available upon request
- 5VA Flammability Rating

Product Overview

The CGS-ESOTWFM outdoor multipurpose push button can be used for a wide range of applications with the CGS Merlin range of safety systems.

The CGS-ESOTWFM is a twist re-set, flush mounted button. Comes with a low profile polycarbonate cover to protect the emergency button without restricting legitimate operation.



Specification

- Temperature range of button 15° to 120°F (-9° to +49°C).
- 1 N.O. and 1 N.C. contact. 1 AMP @ 250 VDC 3 AMP @ 600VAC
- All terminals accept two 12 to 18 (AWG)

Construction

- Station housing molded of tough polycarbonate
- UL listed to U.S. and Canadian safety standards

Dimensions (Cover)

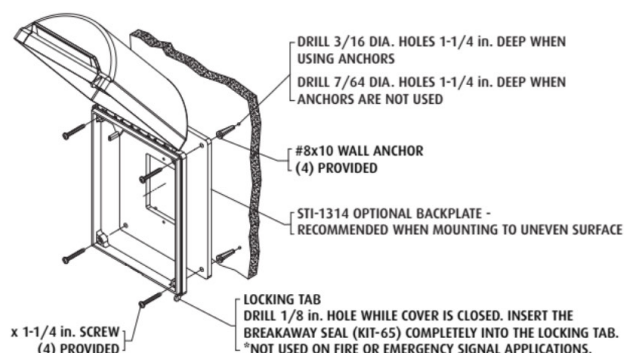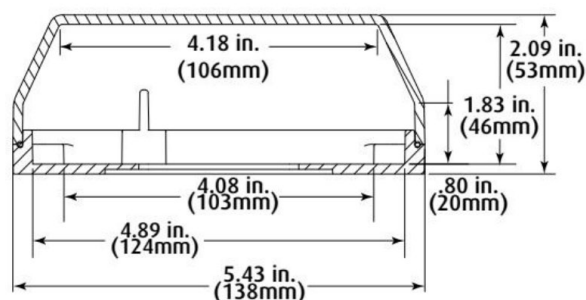

Dimensions (Button)

